


PORPOISE & DOLPHIN PINGER

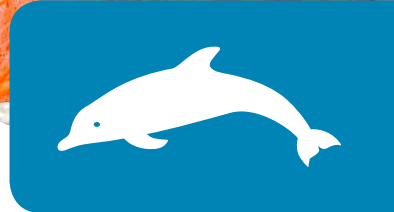

✓ REDUCE INTERACTIONS WITH PORPOISE AND DOLPHINS

✓ FISH SUSTAINABLY

✓ MEETS EUROPEAN AND USA PINGER REGULATIONS

OPERATING SPECIFICATIONS

- Frequency: 10 kHz
- Sound pressure level: 132 decibels.

BATTERY

- Either 1.5v Alkaline C cell or 3.6v Lithium-Ion C cell.

BATTERY LIFE

- Alkaline = 12 months based on 12 hours use per day
- Lithium-Ion = 24 months based on 12 hours use per day.

DIMENSIONS

- 140 mm (5.5 inches) long x 50 mm (2 inches) wide.

WEIGHT

- 78 grams / 2.75 ounces
- 150 grams / 5 ounces (with battery).

OPERATION

- Hands-free water activated capacitance switch
- Works in all water – salt or fresh.

EXTERNAL CASING

- Highly durable UV resistant copolymer.

INTERNAL HOUSING

- Tough thermoplastic polymer.

PINGER SPACING

- Space Pingers every 100 meters on the net.

FEATURES

Meets European 812/2004 and USA Harbor Porpoise Pinger regulations.

Hands-free operation. Turns on and off instantly as Pinger enters and leaves the water.

Smallest, lightest safest Porpoise and Dolphin Pinger on the market.

Combining an external copolymer carrier with super tough internal thermoplastic polymer housing with optimised engineering, we offer the world's toughest most reliable Porpoise and Dolphin Pinger.

The internal electronic capsule is locked inside the external housing – the internal electronic capsule cannot fall out while Pinger is attached to the net, unlike competitors' products.

Our Porpoise and Dolphin Pingers do not affect the shape of the net.

Pingers are easily and quickly attached to net ropes of all size. No need to thread ropes through our casing means faster, easier attaching and removing.

Only Porpoise and Dolphin Pinger that offers choice to use either Alkaline or long life Lithium-Ion battery.

Easy to see battery level LED indicator with Red LED low battery warning.

Easy to replace batteries.

Pingers are supplied with batteries and attachment cord – ready to fit too easily and quickly to the net.

Advanced optimised sound generation ensures a consistent output of 132 decibels.

Tested to 1000 meters depth.

12 months warranty.